



NOTE: PLACE A MINIMUM 6 INCHES 22-A GRAVEL, SLAG, OR CRUSHED ASPHALT W/ 250#/syd BITUMINIOUS SURFACE.

PLACE CULVERT PIPE IN THE DITCH AS DETERMINED BY ENGINEER.

IF SHOULDERS ARE PAVED THE 25' RADIUS CAN BE DECREASED BY THE WIDTH OF THE PAVED SHOULDER.

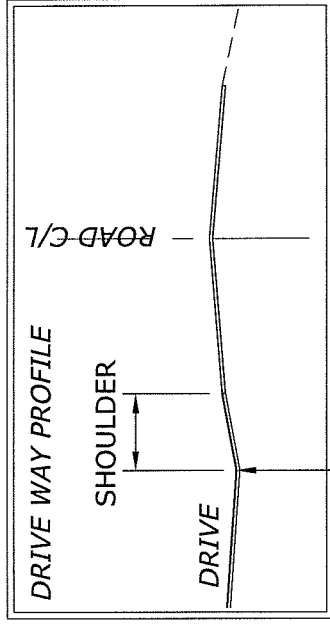

DRIVE GRADE @ SHOULDER LINE SHALL BE 0.3' LOWER THAN EDGE OF PAVEMENT.

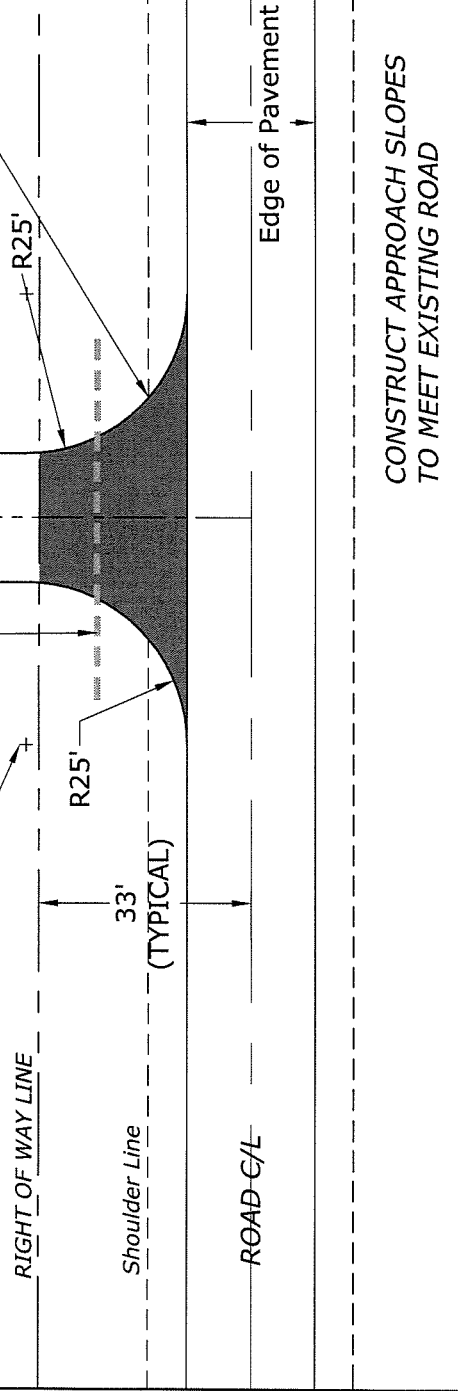

CONSTRUCT APPROACH SLOPES TO MEET EXISTING ROAD

NOTE: STANDARD DIMENSIONS ARE GIVEN. ANY VARIATIONS MUST BE APPROVED BY THE COUNTY HIGHWAY ENGINEER.

MINIMUM REQUIREMENTS FOR RESIDENTIAL DRIVES/ROADS FOR SERVING 3 TO 8 PARCELS SCALE 1"=30'